



THE IDEA

Our goal was to build a sales booth which can be not only safely stored, but also quickly assembled or disassembled.

THE RESULT

Space-saving: our kiosks do not exceed the maximum depth 115 cm when folded. This makes them easier to transport, as you can fit two kiosks next to each other on the truck.

Quick assembly and disassembly: the kiosks are with foldable floor and walls, which makes the preparation for transport very easy. Two people can assemble the kiosk (including roof) in approx. 30 minutes* and then fold it for transport in approx. 15 minutes.

**(For quick assembly a level surface is required. For places with an uneven surface we recommend our metal foundation frame.)*

ACCESSORIES

We offer a wide range of accessories for our kiosks. Our galvanized metal foundation frame enables you to assemble the kiosk even on an uneven surface. For quick and tool-free installation of roof cover material we recommend our tailor-made roof tarpaulin.

Detailed informations are in our accessories offer.

Technical specification

The kiosk is constructed from strengthened wall panels and from pre-assembled floor, so it always can be assembled or disassembled without problems. It also takes very little space (pent roof, width/depth/height: 304 x 100 x 260 cm, apex roof, width/depth/height: 304 x 112 x 260 cm), which makes storing easier.

Width of the kiosk after assembly is 300 cm and depth is 250 cm, so it can fit easily into any event. Door 82 cm x 181 cm can be in either left- or right-hand side.

**Even base is required for quick assembly.
In case of uneven base we recommend using our metal frame.*

Dealer's address



Our
123 Kiosks
can be assembled
by only two people
in approx. 30 minutes*.



Discover our diversity

www.berth-holzbau.eu

Detailed informations about our products are available at our authorized dealers!

The articles, images and drawings in this catalog are protected by copyright. Reprinting, even in part, is strictly prohibited and requires our explicit written approval. Colour deviations from the original colours are due to the printing process.

We reserve the right to make technical changes, errors and interim model changes, reclamations resulted from these reasons are excluded. Illustrations may show special accessories that are not included in the offer. All floor plans shown are not to scale and are for illustration purposes only.
All models are delivered unpainted, without roof cover material.

EN-2023-01-BHB-123-Verkaufsstand




THE SPECIAL KIOSK
TO ASSEMBLE IN APPROX. 30 MINUTES





LOG CABIN CONSTRUCTION ■ PREFABRICATED BUILDINGS ■ POST-AND-BEAM CONSTRUCTION



THE SPECIAL KIOSK TO ASSEMBLE IN APPROX. 30 MINUTES

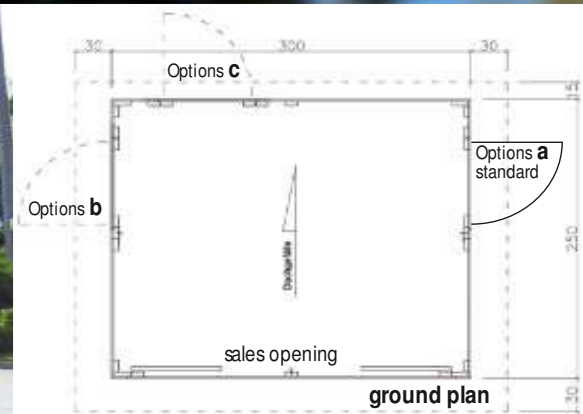

PENT ROOF

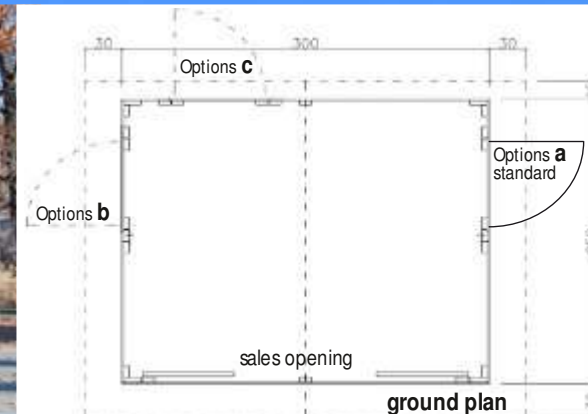

APEX ROOF



TECHNICAL DATA

wall thickness:	19 mm	roof slope:	10°	volume:	ca. 17 m ³
size:	300 x 250 cm (BxT)	roof overhang:	V/L/R = 30, H = 15 cm	doors:	79 x 181 cm (BxH)
max. height:	ca. 265 cm	roof surface:	ca. 11 m ²	sales opening:	272 x 108 cm (BxH)
side wall height:	front 245, back 202 cm	wall surface:	ca. 24 m ²	sales shelf:	ca. 87 cm (floor)

order number:
ST-P01a (door in the right-hand wall), ST-P01b (door in the left-hand wall) und ST-P01c (door in the back wall)

How to assemble the kiosk



Make the floor even and unfold it

Put the roof elements to the side and unfold the kiosk's walls



Lock the bolts

Put up roof elements, fix them and screw to the kiosk



Open the sales shutters

Install roof fascia

.... DONE!

All floor plans show external wall dimensions. The drawings shown are not to scale.

TECHNICAL DATA

wall thickness:	19 mm	roof slope:	18°	volume:	ca. 17 m ³
size:	300 x 250 cm (BxT)	roof overhang:	V/L/R = 30, H = 20 cm	doors:	79 x 181 cm (BxH)
max. height:	ca. 265 cm	roof surface:	ca. 12 m ²	sales opening:	272 x 108 cm (BxH)
side wall height:	206 cm	wall surface:	ca. 23 m ²	sales shelf:	ca. 87 cm (floor)

order number:
ST-S01a (door in the right-hand wall), ST-S01b (door in the left-hand wall) und ST-S01c (door in the back wall)

How to assemble the kiosk



Make the floor even and unfold it

Put the roof elements to the side and unfold the kiosk's walls



Lock the bolts

Put up roof elements, fix them and screw to the kiosk



Open the sales shutters

.... DONE!

All models are delivered unpainted, without roof cover material (unless ordered differently). Photos may show accessories which are not in our offer.



ACCESSORIES

USEFUL ACCESSORIES for easier assembly and usage of the kiosk

Item description	Article number
1 Steel foundation frame, adjustable, galvanized	STZ-FR01a
2 Fuse box and power socket	STZ-E01a
3 Lamp with fixings and wiring	STZ-L01a
4 Shelf (installed from the inner side of the sales opening)	STZ-AB01a
3-point lock	STZ-T3
wood oil treatment	STZ-FO
5 Apex roof / pent roof	
6 Tarpaulin with openings and hooks	STZ-DE02-S/P



Installation of the foundation frame: put the kiosk onto the first frame, install and level the second frame. Done!



Put the tarpaulin on the roof. Put the rings on the hooks (underside of the roof overhangs) and secure with string. Install roof fascia. Done!